


Drywall Thin Coat Angle Bead

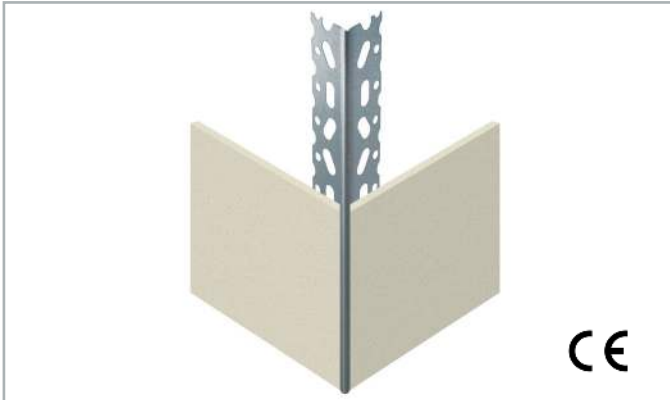

Alpha Drywall Thin Coat Angle Bead

Designed to produce straight edges in drylining applications.

The Alpha drywall angle bead provides the plasterer with the ability to produce true straight edges and give an excellent key for thin coat (skim) plastering.

Fixing all the products is simple and the beads are designed with good resistance to cracking, chipping and impact damage on corners and edges.

Application

A wider-wing thin coat board bead for plaster skimming on plasterboard lined walls or overskim of existing plastered walls.

Plaster depth 2/3mm.

Nail holes for easy fix with drywall nails. The bead can alternatively be installed using a suitable adhesive or plaster dabs at maximum 600mm intervals.

Scalloped edge for an excellent plaster key

Beads can be cut to size as required using tin-snips and/or a hacksaw. The wider perforated wings provide an improved coverage over a standard wing and increase the key to prevent cracking.

Avoid damage to bead and coating when trowelling.

Internal application only.

COSHH & Health and Safety

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions, gloves should be worn.

Product Code	Dimension	Quantity (Per Box)	Weight (kgs)
STO6803	2.4m x 25mm wing	50 lengths	15
STO6804	2.7m x 25mm wing	50 lengths	16.5
STO6805	3.0m x 25mm wing	50 lengths	18

TECHNICAL SPECIFICATIONS

Standard	Material	Material gauge	Reaction to Fire
BS EN14353:2007+A1:2010	Galvanised mild steel DX5AD+Z275 (275g/m ² Zinc coating)	0.4mm	Class A1